

Oskarshamn site investigation

Correlation of Posiva Flow Log anomalies to core mapped features in KLX12A, KLX13A, KLX14A, KLX15A and KLX16A

Maria Wikström, Torbjörn Forsmark, Miriam Zetterlund,
Ingela Forssman, Ingvar Rhén
SWECO Environment

December 2008

Svensk Kärnbränslehantering AB
Swedish Nuclear Fuel
and Waste Management Co
Box 250, SE-101 24 Stockholm
Phone +46 8 459 84 00



Oskarshamn site investigation

Correlation of Posiva Flow Log anomalies to core mapped features in KLX12A, KLX13A, KLX14A, KLX15A and KLX16A

Maria Wikström, Torbjörn Forsmark, Miriam Zetterlund,
Ingela Forssman, Ingvar Rhén
SWECO Environment

December 2008

Keywords: Hydrogeology, Hydraulic tests, Difference flow measurements, Fractures, Crush, Laxemar, KLX12A, KLX13A, KLX14A, KLX15A and KLX16A.

This report concerns a study which was conducted for SKB. The conclusions and viewpoints presented in the report are those of the authors and do not necessarily coincide with those of the client.

Data in SKB's database can be changed for different reasons. Minor changes in SKB's database will not necessarily result in a revised report. Data revisions may also be presented as supplements, available at www.skb.se.

A pdf version of this document can be downloaded from www.skb.se.

Abstract

In the boreholes KLX12A, KLX13A, KLX14A, KLX15A and KLX16A the difference flow logging and core mapping with the Boremap system were conducted during 2006 and 2007. These data have been used to identify individual geological mapped features as fractures or crush zones that correspond to flow anomalies identified with the Posiva Flow Log/Difference Flow (PFL) method.

A few general results of the Boremap are shown in Table I and corresponding anomalies in Table II. In several cases a flow anomaly can be connected to several fractures if they are close to the anomaly. In most of these cases, it may be one of the interpreted fractures, some of them, or even all of them that correspond to the anomaly.

Table I. Boremap data for the PFL-s (5 m sequential measurements) measured interval in KLX12A, KLX13A, KLX14A, KLX15A and KLX16A.

Object	KLX12A	KLX13A	KLX14A	KLX15A	KLX16A
Measured interval in the borehole with PFL-s (m)	102.13–597.25	101.22–589.58	17.14–167.5	77.58–971.02	20.39–420.63
No of open fractures mapped as Total /(Certain/ Probable/ Possible) in the PFL-s measured interval	1,151 (55 / 376 / 720)	2,044 / (244 / 1,127 / 673)	608 (83 / 302 / 223)	1,679 (174 / 727 / 778)	1,186 (103 / 445 / 638)
Mean fracture frequency of open fractures (fractures/m)	2.32	4.19	4.04	1.88	2.96
No of partly open fractures mapped as Total /(Certain/ Probable/Possible) in the PFL-s measured interval	3 (0 / 2 / 1)	3 / (3 / 0 / 0)	5 / (5 / 0 / 0)	7 (7 / 0 / 0)	5 (4 / 1 / 0)
Mean fracture frequency of partly open fractures (fractures/m)	0.006	0.006	0.033	0.008	0.012
No of crush zones in the PFL-s measured interval	3	72	12	7	4
Appr. No of fractures in crush zones assuming 40 fractures/m	6.64	717.20	58.00	17.28	10.32
Mean No of fractures in a crush zone	2.21	9.96	4.83	2.47	2.58
Mean fracture frequency of Total open fractures (All open, partly open and crush zone fractures) (fractures/m)	2.34	5.66	4.46	1.91	3.00
No of sealed fractures mapped as Total /(Certain/ Probable/Possible) in the PFL-s measured interval	1,814 (1,813 / 1 / 0)	1,650 (1,647 / 2 / 1)	675 (674 / 1 / 0)	3,471 (3,467 / 2 / 2)	2,489 (2,488 / 0 / 1)
Mean fracture frequency of sealed fractures (fractures/m)	3.66	3.38	4.49	3.88	6.22

Table II. Flow anomalies in KLX12A, KLX13A, KLX14A, KLX15A and KLX16A.

Object	KLX12A	KLX13A	KLX14A	KLX15A	KLX16A
Measured interval in the borehole with PFL-s (m)	102.13–597.25	101.22–589.58	17.14–167.5	77.58–971.02	20.39–420.63
Total No of PFL-f anomalies (“Certain”+“Uncertain”)	77	155	72	78	78
No of PFL-f anomalies mapped as “ Certain ”	53	110	50	55	62
No of PFL anomalies mapped in crush zones	1	32	9	7	4
Mean feature frequency of PFL-f anomalies (Total) (anomalies/m)	0.156	0.317	0.479	0.087	0.195
No of crush zones in the PFL-s interval, Total/No. with one or more PFL-f anomalies	3 / 1	72 / 27	12 / 9	7 / 7	4 / 4
Mean frequency of crush zones with PFL-f anomalies	0.33	0.38	0.75	1.00	1.00
PFL-f anomaly connected to a Geological feature (Best Choice), accuracy					
Number of PFL anomalies identified within distance <0.2 m from Geological features (open and partly open fractures and crush zones)	73	150	71	75	78
Number of PFL anomalies identified within distance 0.2–0.4 m from Geological features (open and partly open fractures and crush zones)	1	2	1	0	0
Number of PFL anomalies identified within distance 0.2–0.5 m from Geological features (open and partly open fractures and crush zones)	0	0	0	0	0
Number of PFL anomalies identified within distance >0.5 m from Geological features (open and partly open fractures and crush zones)	0	0	0	1	0
Number of PFL anomalies within a distance of 0.1 m from sealed fractures (broken / unbroken), thus, not correlated to open fractures or crush zones	0 / 0	1 / 0	0 / 0	0 / 0	0 / 0
Number of PFL anomalies within a distance of >0.1 m from sealed fractures (broken / unbroken), thus, not correlated to open fractures or crush zones	0 / 0	0 / 1	0 / 0	2 / 0	0 / 0

Contents

1	Introduction	7
2	Objective and scope	9
3	Methodology	11
3.1	Boremap data	11
	3.1.1 Length correction	11
	3.1.2 BIPS and BDT files	11
	3.1.3 Boremap and core mapping	12
3.2	PFL data	13
	3.2.1 Position in the borehole of the flow anomaly	13
	3.2.2 Flow anomaly uncertainty	14
3.3	Correlation of Boremap data and PFL anomalies	14
3.4	Example of data presentation	19
	3.4.1 Flow indication confidence levels for open fractures (PFL confidence)	19
	3.4.2 Confidence level open fractures	19
	3.4.3 Database nomenclature	19
4	KLX12A	25
5	KLX13A	29
6	KLX14A	33
7	KLX15A	37
8	KLX16A	41
9	References	44

Appendices attached on CD

Appendix 1 KLX12A

Appendix 2 KLX13A

Appendix 3 KLX14A

Appendix 4 KLX15A

Appendix 5 KLX16A

1 Introduction

The difference flow logging and core mapping with the Boremap system in the core drilled boreholes, KLX12A, KLX13A, KLX14A, KLX15A and KLX16A within Laxemar local model area near Oskarshamn, Sweden, were conducted during 2006 and 2007. The locations of the boreholes within the Laxemar local model area are shown in Figure 1-1.

The results from the Posiva Flow Log/Difference Flow (PFL) method were reported in /Pöllänen et al. 2007, Väisäsvaara et al. 2006, Väisäsvaara and Pekkanen 2006, Väisäsvaara 2006, 2007/.

Data from the PFL, Boremapping and BIPS images were received from the SICADA database.

Boremap-PFL anomaly correlation for other boreholes are presented in /Forsman et al. 2005a,b, Teurneau et al. 2007, Wikström et al. 2007a,b/ and /Forsmark et al. 2007/.

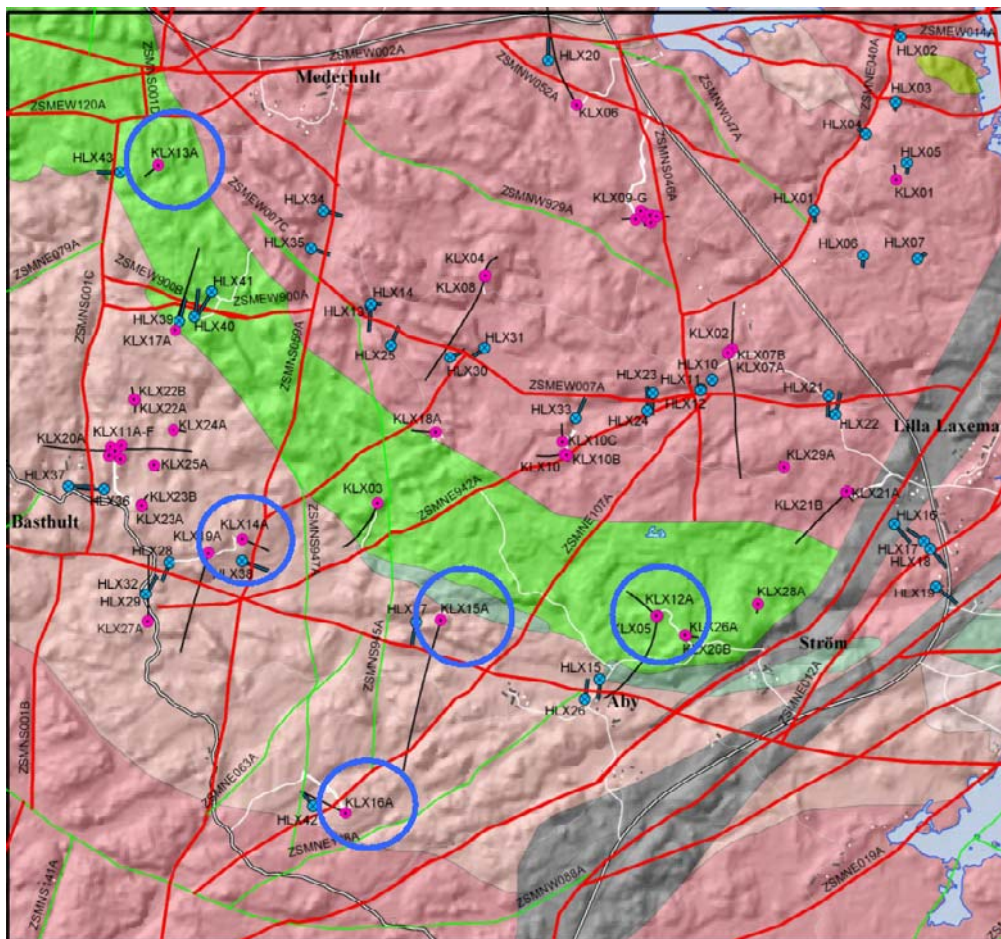


Figure 1-1. Location of core-drilled boreholes KLX12A, KLX13A, KLX14A, KLX15A and KLX16A within Laxemar local model area.

2 Objective and scope

The main objective for the work leading to this report was to identify which geological features mapped as fractures or crush zones that correspond to flow anomalies identified with the Posiva Flow Log/Difference Flow (PFL) method.

The identification of these geological features was made in five cored boreholes KLX12A, KLX13A, KLX14A, KLX15A and KLX16A within Laxemar local model area.

The results are presented in this report and have also been delivered as a database to SKB (indicated as “database” in text below).

3 Methodology

Hydraulically conductive features (flow anomalies) have been correlated to mapped geological features (fractures and/or crush zones). Below, the interpretation methodology is described.

Data used:

- 1) Boremap data.
- 2) BIPS images with BDT-files showing mapped features as fractures, crush, foliation etc.
- 3) Interpretation of Posiva Flow Logg (PFL) anomalies from the overlapping measurements.

3.1 Boremap data

The cored boreholes are documented by geological mapping of the core, using the Boremap system and a borehole image of the borehole wall from BIPS (Borehole Image Processing System). All borehole loggings, including BIPS, are length corrected to facilitate correlation between core data and logging data.

3.1.1 Length correction

During drilling, marks are made in the borehole wall approximately every 50 m. These marks are used to make length corrections of all borehole logging and borehole mapping. A Calliper tool fitted to the logging unit is used to get a reference for the length correction.

3.1.2 BIPS and BDT files

The Boremap data of geological features in SICADA can be superimposed in the BIPS image using a file with extension BDT. The image of the borehole wall from the BIPS-file may deviate cm-dm from the trace shown with the BDT file, due to that linear correction is made between the drilling marks. In the figures and tables in the appendices it is always the corrected length (“Adjusted secup”, not “Secup”) in Boremap data that is compared to the PFL flow anomaly position.

It should be noted that the features seen in the BIPS image with traces according to the BDT-file does not only correspond to fractures; rock contacts etc. are displayed in the same way and there is, unfortunately, no indication on the lines of which type of object that is shown.

BIPS resolution, with SKB standard logging procedure, is in the vertical direction approximately 1 mm and in the horizontal direction 0.66 mm in a borehole with diameter 76 mm, the lower detection limit is thus more or less 1 mm. However, sometimes apertures are set to a value within 0.5–1.0 mm for “open” and “partly open” fractures when the geologist estimates the aperture from the BIPS image and the core. In these cases the fracture may be mapped as “1=visible in BIPS” or “0= not visible in BIPS” in column `VISIBLE_IN_BIPS`(code). The aperture in percussion holes are also estimated from BIPS and should normally be 0 (sealed) or 1 mm or larger. In some cases the geologist has even for percussion holes estimated apertures as small as 0.5 mm.

3.1.3 Boremap and core mapping

Each mapped fracture is first documented as “Broken” or “Unbroken” – depending on how it is found in the core. Each fracture is then classified as “Sealed”, “Open” or “Partly open” and with a judgement of how certain the geologist is of this classification: “Certain”, “Probable” or “Possible”. Some old boreholes are mapped according to the Petrocore system and in such cases only unbroken/broken can be used to separate sealed and (possibly) open fractures.

In more detail, the following is made during mapping:

1. If the fracture splits the core it is mapped as broken, otherwise unbroken
2. If an aperture is seen in BIPS and the core is unbroken, the fracture is mapped as partly open. If an aperture is seen in BIPS and the core is broken the fracture is mapped as open. The aperture is mapped in BIPS and is intended to represent an approximate mean aperture (mean aperture as seen on the borehole wall, may not have much to do with hydraulic aperture).
3. Sometimes when the core is broken no aperture is seen in BIPS. If the core pieces fit badly the aperture is set to 0.5 mm and the fracture is mapped as open and probable. If it is a good fit between the pieces and the surfaces are not fresh, the aperture is set to 0.5 mm and the fracture is mapped as open and possible. If there is a good fit between the pieces and the surfaces are fresh, the aperture is set to 0 mm and the fracture is mapped as sealed.

Generally, it is not possible to see in the BIPS picture if a certain fracture is open or not. Some fractures look quite open in the picture, but the database says they are sealed and sometimes even unbroken. Therefore only the information available in the data file is used to determine if a fracture is open or sealed. When evaluating the pictures the focus has been on the ones mapped as “open” in the database, therefore it has not been controlled that all fractures who are said to be “Visible in BIPS” really are visible and the other way around. It is possible to find open, possibly flowing, fractures said to be “Visible in BIPS” which cannot be found in the BIPS picture. These cases have been noted in the appendices. Concerning “Visible in BIPS”, the mapping geologist has had better possibilities to identify fracture traces in the BIPS image than people involved in this report.

In the appendix pictures, the resolution is not quite as good as in the BIPS pictures seen using the computer. The pictures in the appendices are also slightly smaller than on the computer screen and include white correlation lines and the arrows we have added. The white correlation line makes it even harder to see if a fracture looks open or not in the appendices (but, as mentioned above, the fracture trace may sometimes not be seen on the computer screen using only the BIPS pictures without the white correlation lines).

It should be quite easy to find the fractures in the database if the appendix pictures are used. In the picture itself, the information about strike, dip and adjusted secup can be found. The adjusted secup could, though, be hard to get if the fracture has high amplitude. Using the text associated with the pictures in the appendix, it should not be a problem, because all fractures correlated to the anomaly are listed in adjusted secup order. **The adjusted secup for a fracture is the mean value of the sinusoidal fracture trace, with all points along the trace expressed as adjusted secup coordinates.** Sometimes there are small deviations between strike and dip in figures in appendix B and in Boremap data mainly due to round off in the BDT-data. It is the values in Boremap data that should be considered as the correct ones.

Due to updates of the borehole orientations and BIPS-tool orientation during 2007 there may also be some difference (generally very small) in the figures in Appendices for the fracture orientation compared to the ones in the database, as updated BIPS images were not available for this evaluation.

3.2 PFL data

After a sequential flow logging (PFL-s) in 5 m sections, flow logging with 1 m section by moving the 1 m section in steps of 0.1 m (PFL-f) is made in PFL-s sections above the measurement limit. See e.g. /Pöllänen et al. 2007/, for details.

3.2.1 Position in the borehole of the flow anomaly

The PFL data and corrections made are in detail described in e.g. /Pöllänen et al. 2007/.

Accurate length scale of measurements is difficult to achieve in long boreholes. The main cause of inaccuracy is stretching of the logging cable. The stretching depends on the tension of the cable that in turn depends, among other things, on the inclination of the borehole and on the friction of the borehole wall. The cable tension is higher when the borehole is measured when the cable is moving upward. The cables, especially new ones, may also stretch out permanently.

The length marks in the borehole wall (occurring approximately every 50 m) are detected with the SKB calliper tool. The length scale is firstly corrected according to these length marks. Single point resistance (SPR) is also recorded simultaneously with the calliper logging.

Since SPR is recorded during all measurements, all flow measurement sequences can then be length corrected by synchronising the SPR results with the original calliper/SPR measurement.

In spite of the length correction described above, there are still length errors due to following reasons:

- 1) Point interval in flow measurements is 0.1 m in overlapping mode. This could cause an error ± 0.05 m.
- 2) The length of the test section is not exact. The specified section length denotes the distance between the nearest upper and lower rubber disks. Effectively, the section length can be longer. At the upper end of the test section there are four rubber disks. The distance between these is 5 cm. This will cause rounded flow anomalies, there may be detected flow already when a fracture is between the upper rubber disks. These phenomena can only be seen with short step length (0.1 m). This could cause an error of ± 0.05 m.
- 3) Corrections between the length marks can be other than linear. This could cause error ± 0.1 m in the calliper/SPR measurement.
- 4) SPR curves may be imperfectly synchronized. This could cause error ± 0.1 m

In the “worst case”, the errors of points 1, 2, 3 and 4 above are summed up. The total estimated error for geological features located far from a length mark would then be ± 0.3 m.

Near the length marks the situation is slightly better. In the “worst case”, when the errors of points 1, 2, and 4 above are summed up, the total estimated error would be ± 0.2 m for geological features located near a length mark.

Accurate location is important when different measurements are compared, for instance if the flow logging and BIPS are compared. In that case the situation may not be as severe as the worst case above since parts of the length errors are systematic and the length error is nearly constant for fractures near each other. However, the error of point 1 is of random type.

Fractures nearly parallel with the borehole may also be problematic. Fracture location may be difficult to accurately define in such cases.

3.2.2 Flow anomaly uncertainty

The existence of a flow anomaly is sometime uncertain and in such a case the anomaly is marked "uncertain" in the database and in the appendices.

3.3 Correlation of Boremap data and PFL anomalies

Assumptions:

- As a first assumption, the open and partly open fractures as well as crush zones are assumed to be possible flowing features.
- It is assumed that the precision of the position (LA) in the borehole of the PFL-anomaly is not on the dm level. If an open, partly open fracture or crush zone is within ± 0.5 m of a PFL-anomaly, it is assumed that it can correspond to the PFL-anomaly (in a few cases larger differences have been accepted). The parameters added to the database are;
 - **PFL anom (1):** An index set to 1 if geological features possibly can be associated to a PFL-f anomaly (one or several fractures (or crush) are documented as possible flowing features.)
 - **PFL anom. No.:** Sequential numbering of PFL-f flow anomalies, starting with 1 for the uppermost flow anomaly in a specific borehole.
 - **PFL-anom.Confidence:** Judgement of how close (on a dm-scale) the nearest part of the sinusoidal fracture trace is to LA.
 - **PFL-Deviation fr. L:** The actual deviation (on a dm-scale) of the fractures Adjusted_Secup from LA (defined positive if the fracture is located below LA).
 - **PFL Confidence:** Certain or uncertain, based on PFL measurements.
 - **Best Choice fracture and Alternative Best Choice fracture:** The most likely fracture/crush among the features noted in **PFL anom (1)** ("one or several fractures (or crush) are documented as possible flowing features") that can be associated to a PFL-f anomaly; see below for definition.
- A few **sealed fractures** have been indicated in some boreholes as possible flowing features if the core has been broken AND adjusted secup (Boremap) \approx LA (Borehole length) for the PFL anomaly AND that no open fracture was < 0.6 m from LA, OR that the nearest open fracture is positioned closer than 0.6 m but very well matches another anomaly. When interpreting these broken/sealed fractures, usually only the ones located ± 0.1 m from the anomaly has been mapped. However, in rare occasions, when there are no other opportunities, fractures located at a longer distance have been chosen. These fractures are considered to be very uncertain and may be excluded from the analysis. "PFL anomaly Confidence" is set to zero (0) in the database for these cases (Example 1 and 2).
- Frequently, several **open fractures** are within ± 0.2 m of LA for the PFL-anomaly and it is judged that one or all of them may be flowing features. If "FRACT_INTERPRET" is used in the database, the "Certain, Probable, Possible" can be used to judge if one fracture may be more likely to be a flowing feature. (See also the "Best Choice"-discussion below.) In a few cases, the mapped open fractures are so close (< 1 cm) that possibly one could consider them as one fracture. In some cases where open fractures have been identified within ± 0.2 m of LA, there may be more open fractures at a distance ± 0.2 – 0.5 m that are not included in the database as possible flowing features.

PFL-anom. Confidence

Example 1: KLX06. PFL anomaly no 108


Bh-length, LA (for PFL-anomaly) = 331.40 m (red line)

Adjusted secup (for fracture) = 330.93 m

PFL-anom. confidence = 5

The green line marks the open fracture closest to the anomaly. Since the distance between LA and the adjusted secup is >0,4 m (white arrow), PFL-anomaly confidence is set to 5 and Deviation to -5. Confidence is measured from the nearest trace of the fracture, while Deviation is measured from the adjusted secup to LA.

In a few cases when the fracture trace has not been shown in the BIPS image, the PFL-anom. Confidence is set to PFL-Deviation fr. L, but without sign.

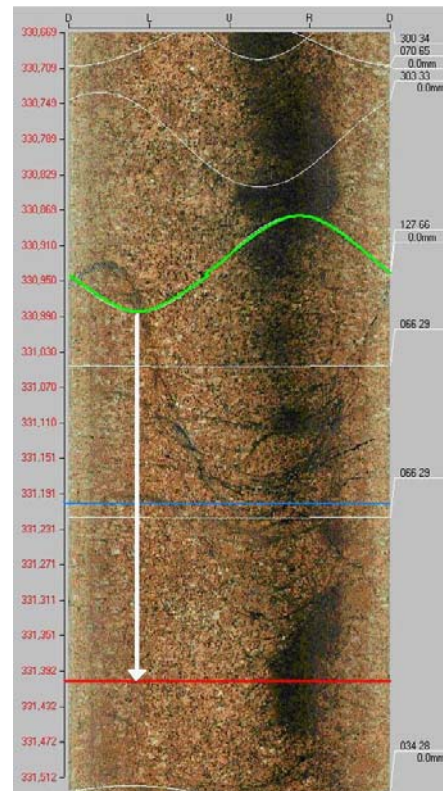

Example 2: KLX09B. PFL anomaly no 5

Bh-length, LA (for PFL-anomaly) = 23.80 m

Adjusted secup (for fracture) = 23.84 m

Fract_interpret / Varcodes = **sealed / broken**

PFL-anom. confidence = 0

Nearest open fracture secup = 24.13 m

If no open fractures exist in the vicinity (< 0.6 m) of the anomaly, a sealed fracture can be chosen most probable. The attribute should generally be Sealed/broken, indicating a (weak) possibility that it actually can be an open fracture. In a few cases Sealed/unbroken have been used in a few boreholes but is extremely rare. PFL-anom. Confidence is then 0.

-
- In some cases several PFL anomalies may be connected to a single geological feature, generally a crush zone but sometimes also an open fracture with a fracture trace with high sinusoidal amplitude. Some PFL-anomalies are located very close to each other Secup-wise; in these cases a fracture with “normal” sinusoidal amplitudes can be correlated to both anomalies. In those cases where a single fracture has been assigned Best choice of several anomalies, a single “1” is put in the core file column for Best Choice fracture and the sequential number of the anomalies are put into the columns bc_seq_no_anom_1, bc_seq_no_anom_2, and bc_seq_no_anom_3 respectively.


- Some open, possibly flowing, fractures have very high amplitudes, stretching over up to several metres of the borehole wall. These fractures can, because of their shape, have an influence on the flow conditions quite a long distance from the level indicated by the fractures “adjusted secup”-value. When evaluating the data, these fractures have been given a lower “PFL-anomaly confidence” than suggested only by the distance between the fractures adjusted secup and the level of the PFL anomaly. **PFL-anomaly confidence is measured from the nearest trace of the fracture, while Deviation is measured from the adjusted secup to the position LA of the PFL anomaly** (see Example 1). If the fracture cuts the level of the PFL-anomaly, the PFL-anomaly confidence is set to one (1, which is the highest confidence), independent of how long the distance between the adjusted secup value and the level of the anomaly is. To be consequent, some fractures with high amplitudes that **almost** (+/- 0.2 m) cut the PFL-anomaly level have also been included in the analysis. The PFL-anomaly confidence has been set to 2 in these cases, even if the trace is closer than 1 dm from the adjusted secup of the anomaly (Example 3). However, in some cases the PFL-anomaly confidence has been set to 1 if the trace is closer than 1 dm from the adjusted secup of the anomaly.
- For each PFL-anomaly ONE fracture is chosen as the most probable to represent the PFL-anomaly, which is marked as “Best Choice fracture” in the data base. The reason for this is that several fractures may represent a single PFL-anomaly according to the criteria stated above. Similar choices are made for crush zones (Best Choice Crush: See Example 4). The choice is made in the following order:
 1. If the aperture of the fracture is **visible** in the BIPS image, mapped as “**open**” and “**certain**” and the fracture trace for the fracture is within ± 0.2 m from the PFL-anomaly, the fracture is chosen. If two or more fractures are at the same distance from the PFL-anomaly, the uppermost listed in the data file is chosen. However, if one LOOKS more plausible viewing the BIPS image, than the other, that one is chosen. This decision is based on the judgement that the chosen fracture’s aperture seems more open than others.
 2. Criterion 1 is not satisfied. If the fractures aperture is **NOT visible** in the BIPS image, mapped as “**open**” and “**certain**” and that the fracture trace for the fracture is within ± 0.2 m from the PFL-anomaly, the fracture is chosen. If two or more fractures are at the same distance from the PFL-anomaly, the uppermost listed in the data file is chosen.
 3. Criteria 1 and 2 are not satisfied. If the fractures aperture is **NOT visible** in the BIPS image, mapped as “**open**” and “**probable**” and that the fracture trace for the fracture is within ± 0.2 m from the PFL-anomaly, the fracture is chosen. If two or more fractures are at the same distance from the PFL-anomaly, the uppermost listed in the data file is chosen.
 4. Criteria 1–3 are not satisfied. If the fractures aperture is **NOT visible** in the BIPS image, mapped as “**open**” and “**possible**” and that the fracture trace for the fracture is within ± 0.2 m from the PFL-anomaly, the fracture is chosen. If two or more fractures are at the same distance from the PFL-anomaly, the uppermost listed in the data file is chosen.
 5. Criteria 1–4 are not satisfied. If the fractures aperture is **NOT visible** in the BIPS image, mapped as “**sealed**” and “**broken**” and that the fracture trace for the fracture is within ± 0.2 m from the PFL-anomaly, the fracture is chosen. If two or more fractures are at the same distance from the PFL-anomaly, the uppermost listed in the data file is chosen.
 6. Criteria 1–5 are not satisfied, the nearest of the other identified fractures that possibly corresponds to the PFL-anomaly, is chosen as “Best Choice fracture”.

High amplitude

Example 3: KLX03. PFL anomaly no 38

Bh-length, LA (for PFL-anomaly) = 662.40 m
 Adjusted secup (for fracture) = 662.17 m
 PFL-anom. confidence = 1

The distance between adjusted secup of the fracture (green line on top) and the anomaly (red line) is further away than $\pm 0,2$ m (blue lines). However, because of its high amplitude, the fracture cuts the anomaly: PFL-anom. Confidence = 1.

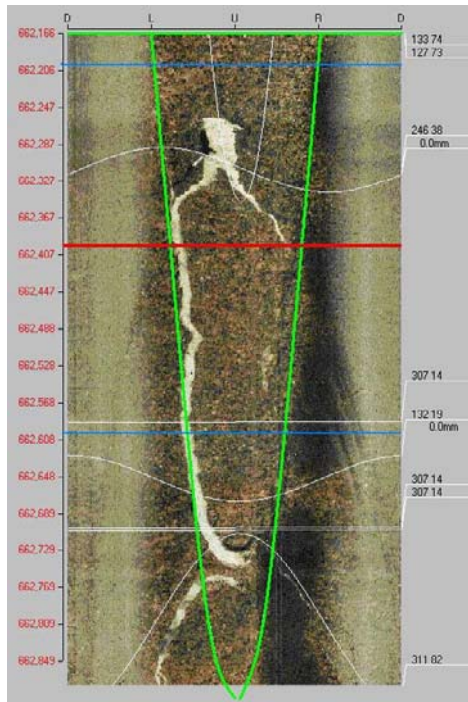

Best choice

Example 4: KLX09B PFL anomaly no 19


Bh-length LA (for PFL-anomaly) = 49.40 m
 Adjusted secup (for fracture) = 49.30 m
 Fract_interpret / Varcode = open fracture

Adjusted secup – seclo w = 49.38–49.51 m
 Fract_interpret / Varcode = crush zone

Best choice crush

In some cases both a fracture and a crush zone is as plausible as an explanation to an anomaly. Then only the crush zone is documented as Best choice (even if they are both within ± 0.2 m from the PFL-anomaly). The fracture is noted as "alternative Best Choice".

The red arrows pointing at the length scale show the secup and seclo w of the crush. (Always red arrows for crushes.) The red arrow pointing at the white trace is the Best choice fracture. The red horizontal line is the LA for the flow anomaly.

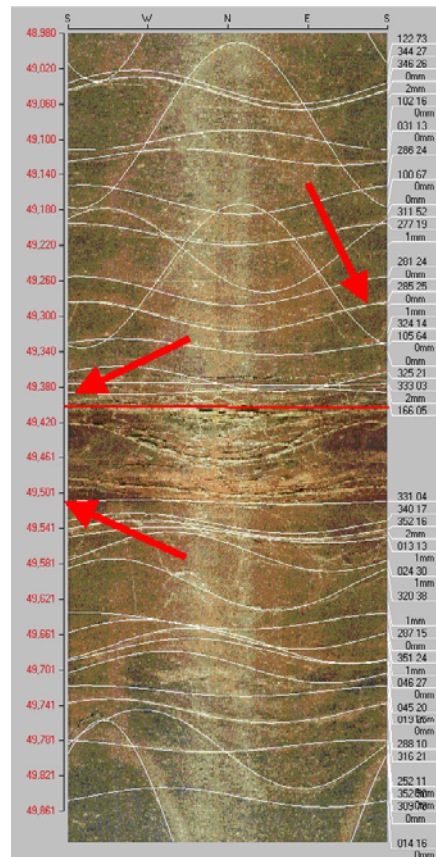

When the criteria above are considered: **If several fractures with the above attributes are within ± 0.2 m from the PFL-anomaly, the fracture closest to the PFL-anomaly is chosen as “Best Choice fracture”** among the features noted in **PFL anom (1)** (“one or several fractures (or crush) are documented as possible flowing features”). **The other fractures are notified in the data base as “alt BC fr”**. The number in “alt BC fr” column gives the number of fractures that satisfies the above criteria. (It is thus possible to search for the cases where it is more or less impossible to make a single fracture as “Best Choice fracture”.) However, if one LOOKS more plausible viewing the BIPS image, than the other, that one is chosen as **“Best Choice fracture”**.

If a crush zone is present within ± 0.2 m from the PFL-anomaly, **“Best Choice crush”** is chosen. If two crush zones are at the same distance from the PFL-anomaly, the uppermost is chosen. In these cases if fractures are documented within crush zone in the fracture data base, they are noted as “alternative Best Choice” in the data file and the crush zone as Best Choice. This choice is made in addition to the “Best Choice Fracture” procedure described above. **The connection between the fractures and the crush zones and which ones are chosen as Best Choice has to be examined by the user of the data base (Example 4)**. If several crush zones are within ± 0.2 m from the PFL-anomaly, the crush closest to the PFL-anomaly is chosen as “Best Choice crush”. The other crush zones are notified in the data base as “alt BC crush”. The number in alt BC crush” column gives the number of crush zones that satisfies the above criteria. (It is thus possible to search for the cases where it is more or less impossible to make a single crush zone as “best choice crush”.)

Alternative Best choice

Example 5: KLX09F. PFL anomaly no 5c and 5d.

Bh-length LA (for PFL-anomaly) = 17.20 m

5c Adjusted secup (for fracture) = 17.37 m

Best choice

5d Adjusted secup = 17.38 m

Fract_interpret / Varcod = open fracture


Frac.interp. confidence = Certain

PFL-anom. confidence = 2

Two identical fractures, both certain, close to each other and both candidates to be the best choice. This is an obvious case where alternative best choice is assigned.

If 3 fractures carry the same attributes (Fract interpretation, Fract. Confidence, PFL Confidence and Deviation) the upper fracture is chosen Best choice and all of the fractures are given the number 3 as alt. best choice in the database. Thus, the number in column “alt BC fr” can be used to search for these cases and get a view on how frequent “alt BC fr” is and then how many fractures are involved.

Red arrow shows Best Choice. Black arrows are used for Alt-Best choice fractures and possible other fractures. (Alt-Best choice fractures and other possible fractures are for some boreholes not shown in appendices (but in data base) as the figures became less readable due to all the black arrows. Red rings around the orientation indicate the fractures considered possible, including Best choice.)

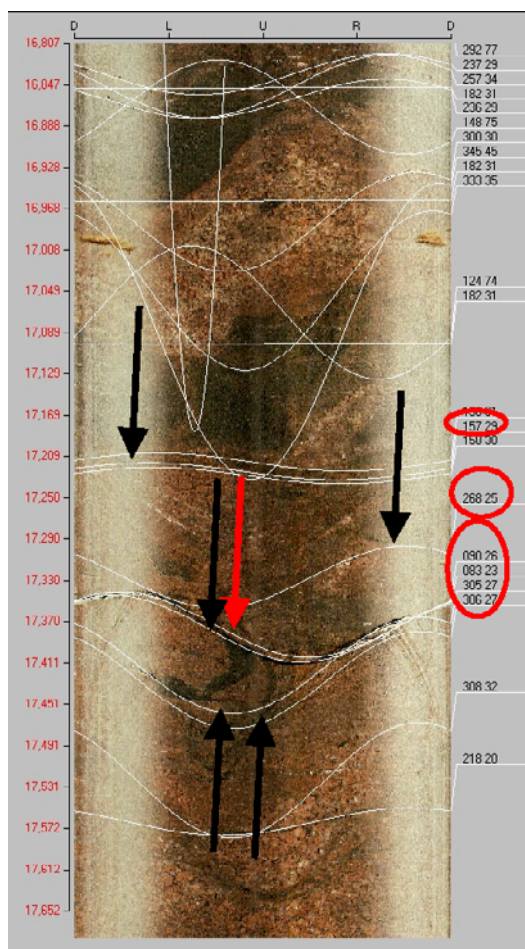

3.4 Example of data presentation

In Figure 3-1 an example is shown on how parts of the results are presented. Below some comments are made on how to interpret the figure.

3.4.1 Flow indication confidence levels for open fractures (PFL confidence)

The classification of “flow indication level of confidence”, equal to the “PFL-anomaly confidence”, is defined as the distance between the anomaly and the interpreted fracture trace. That is, if the anomaly has a flow indication in class 1, the interpreted fracture is within 1 dm from the anomaly. In the same way, the anomaly has the flow indication class 2, if the interpreted fracture is within 2 dm from the anomaly. Four classes have been defined;

Class 1 0–1 dm

Class 2 1–2 dm

Class 3 2–3 dm

Class 4 3–4 dm

Class 5 4–5 dm (*not plotted*)

This classification is used in the figures in this report. In the database, only the numbers (1–5) are used to describe the PFL confidence. Features with PFL confidence > 4 are rare and considered to be non-significant and are not plotted in the diagrams as the one with confidence 1–4.

3.4.2 Confidence level open fractures

The confidence level for open fractures describes the certainty with which the fracture is interpreted. In this report, three levels of confidence in the SICADA database are used;

Level 1 Certain

Level 2 Probable

Level 3 Possible

3.4.3 Database nomenclature

The interpretation of how the PFL anomalies are linked to mapped fractures or crush has been added to the original Boremap and PFL anomaly files provided by SKB. In Tables 3-1 to 3-4 the structure and explanations are shown.

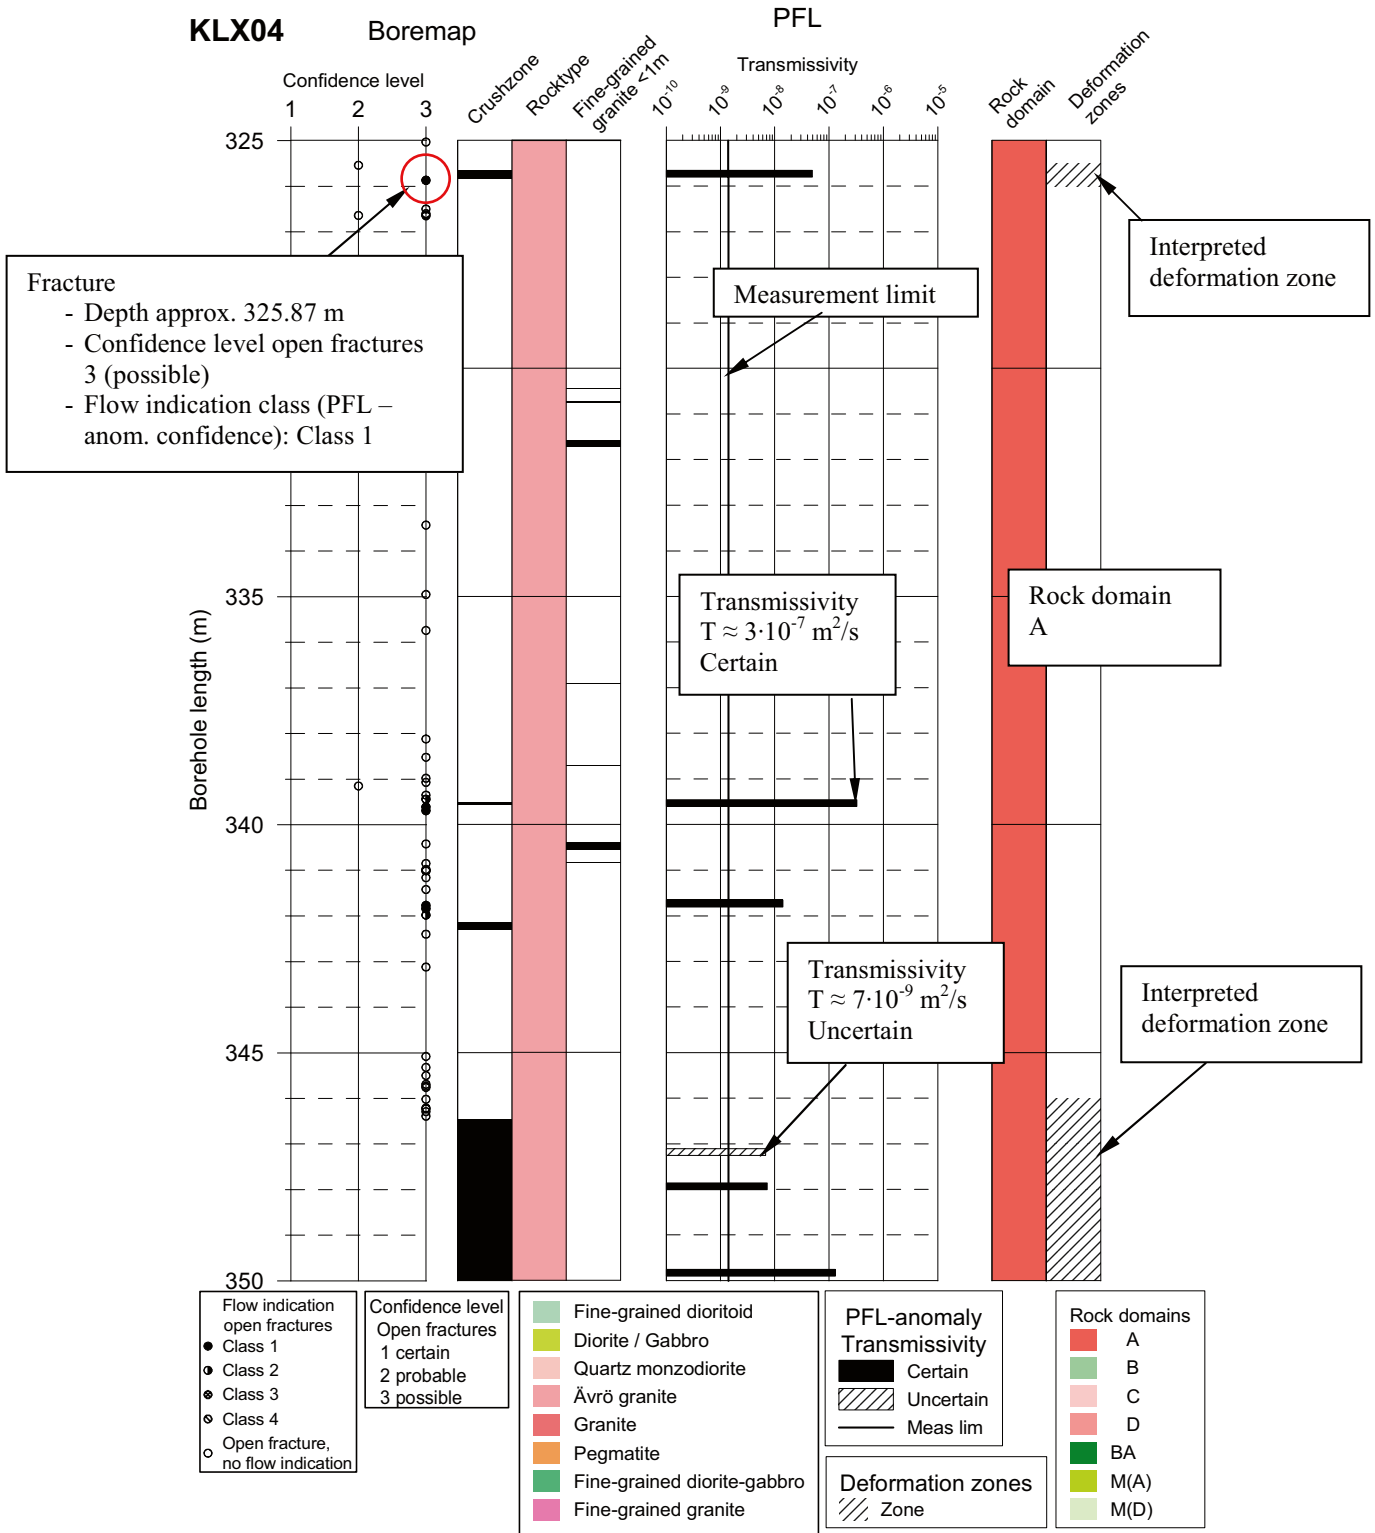


Figure 3-1. Example of a borehole diagram including an interpretation of the flow anomalies and mapped open fractures.

Table 3-1. Structure of essential columns in the database of fractures.

No	Column name in database	Content	Originally in Boremap file	Interpretation of PFL anomalies
1	FRACT_MAPPED	Broken/ Unbroken, as found in core.	X	
2	FRACT_INTERPRET	Sealed/ Open/ Partly open, judgement by the geologist.	X	
3	FRACT_INTERPRET No	1=Sealed/ 2=open/ 3=partly open. For Petrocore data: 1=Unbroken (assumed be sealed), 4=Broken, can probably be assumed to be open.		(added sorting No)
4	APERTURE (mm)	Estimation of aperture from BIPS image.	X	
5	VISIBLE_IN_BIPS (code)	1=Visible in BIPS / 0=Not visible in BIPS.	X	
6	CONFIDENCE	Certain/ Probable/ Possible, judgement by the geologist of the interpretation of FRACT_INTERPRET.	X	
7	CONFIDENCE No	1=Certain/ 2=Probable/ 3=Possible, based on CONFIDENCE for the fracture.		(added sorting No)
8	PFL anom (1)	An index set to 1 if geological features possibly can be associated to a PFL-f anomaly (one or several fractures (or crush) are documented as possible flowing features.)		X
9	PFL-anom. No	PFL No in the PFL-f-anomaly file that is used together with the IDCODE for the borehole to identify PFL-f-anomaly properties. (Sequential numbering of PFL-f flow anomalies, starting with 1 for the uppermost flow anomaly in a specific borehole.)		X
10	PFL-anom. Confidence	A number showing the shortest distance in dm between the geological features trace and the PFL-f anomaly position LA . If =0 then it is a sealed fracture that is broken or unbroken that is linked to the PFL-f anomaly and the interpretation is considered uncertain.		X
11	PFL-Deviation fr. L (+ downwards, dm)	A number showing the distance in dm between the geological features adjusted secup and the position LA of the PFL-f anomaly. If positive it indicates that the geological feature is below the PFL-f anomaly .		X
12	PFL-CONFIDENCE	Certain/ Uncertain, judgement by the performer and reporter of the PFL-f measurements how certain the interpreted PFL-f anomaly was.		X
14	PFL-CONFIDENCE No	1=Certain/ 2=Uncertain, based on PFL-CONFIDENCE.		X
15	Best Choice frac	The fracture that most probable corresponds to a PFL-f-anomaly is given No=1 (BC: Best Choice).		X
16	Alt BC fr	If several fractures of the same character are within ± 0.2 m from the PFL-f-anomaly that could be chosen as "Best Choice fracture", the observation is notified with a number in the column, and the number indicates how many fractures that could be chosen as "Best Choice fracture".		X
17	ADJUSTEDSECUP (m)	The mid point of a feature trace that generally has a sinusoidal shape on the BIPS image.	X	
18	STRIKE (degrees)	Strike of the fracture.	X	
19	DIP (degrees)	Dip of the fracture.	X	

Table 3-2. Structure of essential columns in the database of crush zones.

No	Column name in database	Content	Originally in Boremap file	Interpretation of PFL anomalies
1	VARCODE	Crush Zone	X	
8	PFL anom (1)	An index set to 1 if geological features possibly can be associated to a PFL-f anomaly (one or several fractures (or crush) are documented as possible flowing features.)		X
9	PFL-anom. No	PFL No in the PFL-f-anomaly file that is used together with the IDCODE for the borehole to identify PFL-f-anomaly properties. (Sequential numbering of PFL-f flow anomalies, starting with 1 for the uppermost flow anomaly in a specific borehole.)		X
10	PFL-anom. Confidence	A number showing the shortest distance in dm between the geological features trace and the PFL-f anomaly position LA.		X
11	PFL-Deviation fr. L (+ downwards, dm)	A number showing the distance in dm between the geological features adjusted secup and the position LA of the PFL-f anomaly. If positive it indicates that the geological feature is below the PFL-f anomaly.		X
12	PFL-CONFIDENCE	Certain/ Uncertain, judgement by the performer and reporter of the PFL-f measurements how certain the interpreted PFL-f anomaly was.		X
14	PFL-CONFIDENCE No	1=Certain/ 2=Uncertain, based on PFL-CONFIDENCE.		(added sorting No)
15	Best Choice crush	The crush that most probable corresponds to a PFL-anomaly is given No=1.		X
16	Alt BC crush	If several crush are within ± 0.2 m from the PFL-anomaly that could be chosen as "Best Choice crush", the observation is notified with a number in the column, and the number indicates how many crush zones that could be chosen as "Best Choice crush".		X
17	ADJUSTEDSECUP (m)	The mid point of the upper part of the crush zone trace that generally have a sinusoidal shape on the BIPS image.	X	
18	ADJUSTEDSECLow (m)	The mid point of the lower part of the crush zone trace that generally has a sinusoidal shape on the BIPS image.	X	
19	STRIKE (degrees)	Strike of first fracture set.	X	
20	DIP (degrees)	Dip of first fracture set.	X	

Table 3-3. Structure of essential columns in the database of PFL anomalies.

No	Column name in database	Content	Originally in PFL-anomaly file	Interpretation of PFL anomalies
1	PFL-anom. No	PFL No in the PFL-f-anomaly file that is used together with the IDCODE for the borehole to identify PFL-f-anomaly properties. (Sequential numbering of PFL-f flow anomalies, starting with 1 for the uppermost flow anomaly in a specific borehole.)		x
2	LA	Position of flow anomaly along the borehole (same starting coordinate as for "secup, seclow in fracture and crush files).	X	
3	TRANSMISSIVITY_TDA	Estimated transmissivity of flow anomaly.	X	
4	VALUE_TYPE_TDA	0: value within range for test equipment. -1: value at or below measurement limit, +1 value at or above measurement limit.	X	
5	PFL-CONFIDENCE	Estimation of how certain the existence of the flow anomaly is		(based on column comments)
6	PFL-CONFIDENCE No	Index based on PFL-CONFIDENCE		(added sorting No)

4 KLX12A

The borehole KLX12A was measured in June 2006. It was flow logged with PFL using 5 m test sections in borehole section interval 101.89 to 597.25 m (PFL-s). Upper most section in the borehole for statistics is the lower position of the cone in the borehole (SUB SECLW): 102.30 m. Flow logging for flow anomalies was made in the 1 m test sections (PFL-f) in PFL-s sections with measurable flow rates.

The borehole includes 77 PFL-anomalies, of which 53 are mapped as “certain”. 28 of the anomalies have been correlated to a single fracture. One anomaly has been correlated to a borehole section mapped as crush zones.

No fracture data nor BIPS data exist for the part of the borehole where anomalies 1 (99.1 m) and 2 (100.3 m) occur.

Anomaly 6 (105.5 m) can not be correlated to any fracture.

Table 4-1. Boremap data for the PFL-s measured interval in KLX12A.

Object	KLX12A
Measured interval in the borehole with PFL-s (m)	102.13–597.25
No of open fractures mapped as Total /(Certain/ Probable/Possible) in the PFL-s measured interval	1,151 (55 / 376 / 720)
Mean fracture frequency of open fractures (fractures/m)	2.32
No of partly open fractures mapped as Total /(Certain/ Probable/ Possible) in the PFL-s measured interval	3 (0 / 2 / 1)
Mean fracture frequency of partly open fractures (fractures/m)	0.006
No of crush zones in the PFL-s measured interval	3
Appr. no of fractures in crush zones assuming 40 fr./m	6.64
Mean no of fractures in a crush zone	2.21
Mean fracture frequency of Total open fractures (All open, partly open and crush zone fractures) (features/m)	2.34
No of sealed fractures mapped as Total /(Certain/ Probable/Possible) in the PFL-s measured interval	1,814 (1,813 / 1 / 0)
Mean fracture frequency of sealed fractures (fractures/m)	3.66

Table 4-2. Flow anomalies in KLX12A.

Object	KLX12A
Measured interval in the borehole with PFL-s (m)	102.13–597.25
Total No of PFL-f anomalies (“Certain”+”Uncertain”)	77
No of PFL-f anomalies mapped as “ Certain ”	53
No of PFL-f anomalies mapped in crush zones	1
Mean feature frequency of PFL-f anomalies (Total) (anomalies/m)	0.156
No of crush zones in the PFL-s interval, Total/No. with one or more PFL-f anomalies	3 / 1
Mean frequency of crush zones with PFL-f anomalies	0.33
PFL-f anomaly connected to a Geological feature (Best Choice), accuracy	
Number of PFL anomalies identified within distance <0.2 m from Geological features (open and partly open fractures and crush zones)	73
Number of PFL anomalies identified within distance 0.2–0.4 m from Geological features (open and partly open fractures and crush zones)	1
Number of PFL anomalies identified within distance 0.2–0.5 m from Geological features (open and partly open fractures and crush zones)	0
Number of PFL anomalies identified within distance >0.5 m from Geological features (open and partly open fractures and crush zones)	0
Number of PFL anomalies within a distance of 0.1 m from sealed fractures (broken / unbroken), thus, not correlated to open fractures or crush zones	0 / 0
Number of PFL anomalies within a distance of >0.1 m from sealed fractures (broken / unbroken), thus, not correlated to open fractures or crush zones	0 / 0

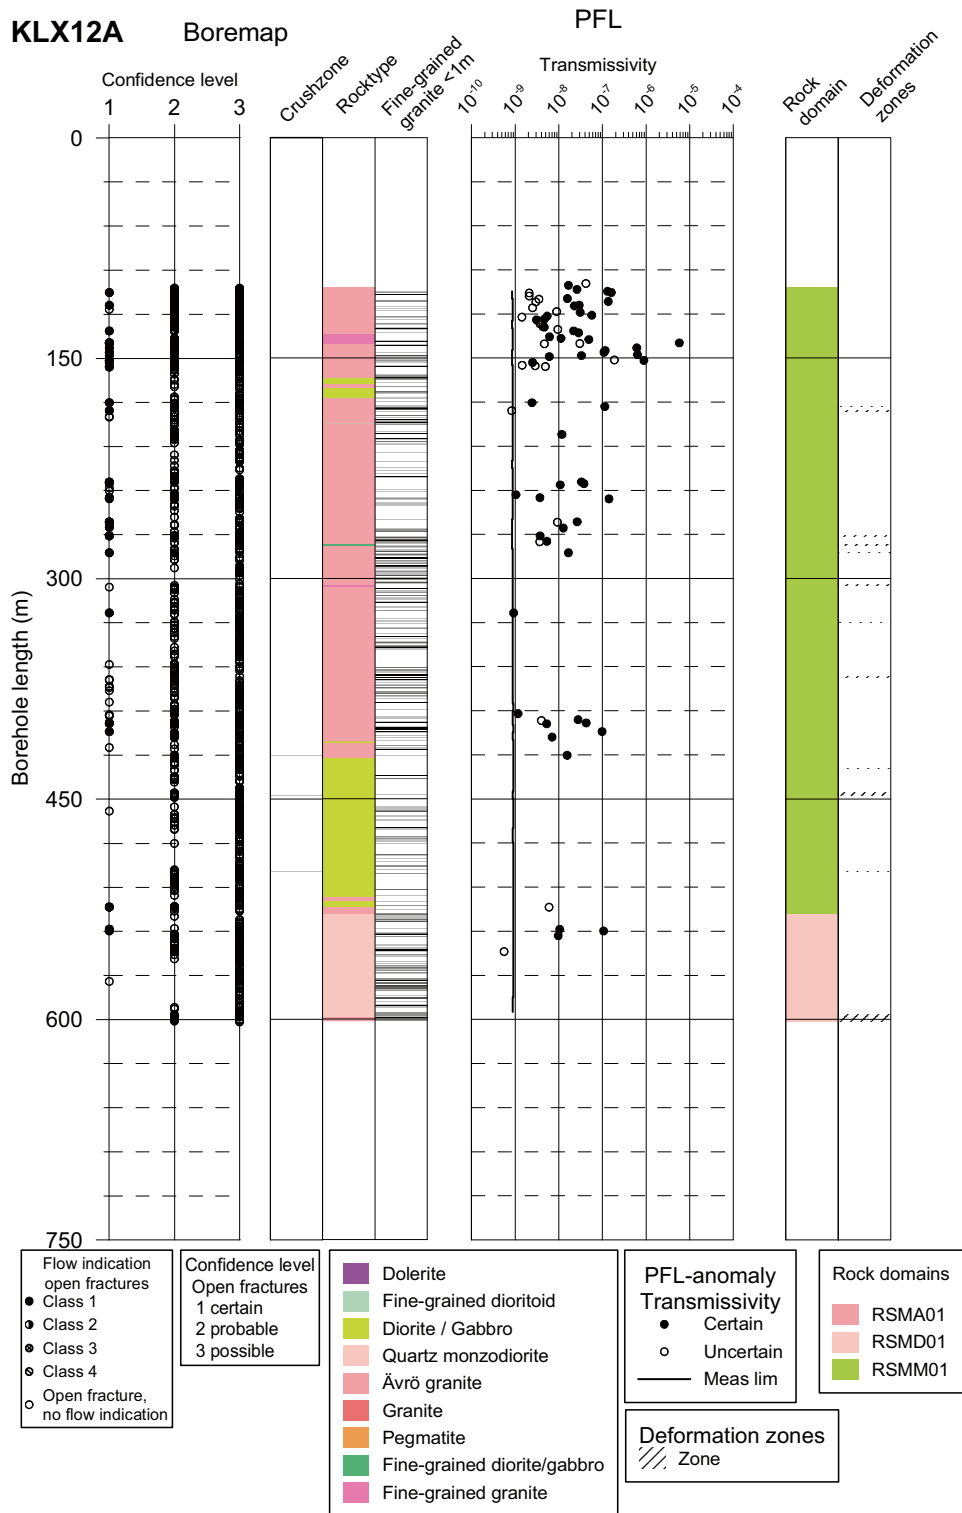


Figure 4-1. Correlations of hydraulic features based on PFL-f measurements, to mapped open / partly open fractures (all plotted as open fractures above) or crush zones in KLX12A. Interpreted deformation zones and Rock Domains shown to the right. Fractures with PFL-anom confidence (flow indication class above) > 4 are not plotted.

5 KLX13A

The borehole KLX13A was measured in September and October 2006. It was flow logged with PFL using 5 m test sections in borehole section interval 94.33 to 589.58 (PFL-s). Upper most section in the borehole for statistics is the lower position of the cone in the borehole (SUB SECLOW): 101.22 m. Flow logging for flow anomalies was made in the 1 m test sections (PFL-f) in PFL-s sections with measurable flow rates.

The borehole includes 155 PFL-anomalies, of which 110 are mapped as “certain”. Some anomalies may be caused by more than one fracture. To some anomalies, a cluster of identified open fractures (up to 11 individual fractures) can be correlated, and it is therefore very hard to determine a certain fracture as conductive, and to decide the Best Choice fracture.

A major vertical fracture, not noted in Boremap, is seen in the BIPS image of anomaly no 47.

At anomaly 127, secup 504.1 m, several fractures or crush are seen in the BIPS image, although no features are noted in the Boremap files for neither crush nor fractures between secup 501.3–516.7 m. **Anomaly 127 (504.1 m) can not be correlated to any fracture.**

Table 5-1. Boremap data for the PFL-s measured interval in KLX13A.

Object	KLX13A
Measured interval in the borehole with PFL-s (m)	101.22–589.58
No of open fractures mapped as Total /(Certain/ Probable/Possible) in the PFL-s measured interval	2,044 / (244 / 1,127 / 673)
Mean fracture frequency of open fractures (fractures/m)	4.19
No of partly open fractures mapped as Total /(Certain/ Probable/ Possible) in the PFL-s measured interval	3 / (3 / 0 / 0)
Mean fracture frequency of partly open fractures (fractures/m)	0.006
No of crush zones in the PFL-s measured interval	72
Appr. no of fractures in crush zones assuming 40 fr./m	717.20
Mean no of fractures in a crush zone	9.96
Mean fracture frequency of Total open fractures (All open, partly open and crush zone fractures) (features/m)	5.66
No of sealed fractures mapped as Total /(Certain/ Probable/Possible) in the PFL-s measured interval	1,650 (1,647 / 2 / 1)
Mean fracture frequency of sealed fractures (fractures/m)	3.38

Table 5-2. Flow anomalies in KLX13A.

Object	KLX13A
Measured interval in the borehole with PFL-s (m)	101.22–589.58
Total No of PFL-f anomalies (“Certain”+“Uncertain”)	155
No of PFL-f anomalies mapped as “ Certain ”	110
No of PFL-f anomalies mapped in crush zones	32
Mean feature frequency of PFL-f anomalies (Total) (anomalies/m)	0.317
No of crush zones in the PFL-s interval, Total/No. with one or more PFL-f anomalies	72 / 27
Mean frequency of crush zones with PFL-f anomalies	0.38
PFL-f anomaly connected to a Geological feature (Best Choice), accuracy	
Number of PFL anomalies identified within distance <0.2 m from Geological features (open and partly open fractures and crush zones)	150
Number of PFL anomalies identified within distance 0.2–0.4 m from Geological features (open and partly open fractures and crush zones)	2
Number of PFL anomalies identified within distance 0.2–0.5 m from Geological features (open and partly open fractures and crush zones)	0
Number of PFL anomalies identified within distance >0.5 m from Geological features (open and partly open fractures and crush zones)	0
Number of PFL anomalies within a distance of 0.1 m from sealed fractures (broken / unbroken), thus, not correlated to open fractures or crush zones	1 / 0
Number of PFL anomalies within a distance of >0.1 m from sealed fractures (broken / unbroken), thus, not correlated to open fractures or crush zones	0 / 1

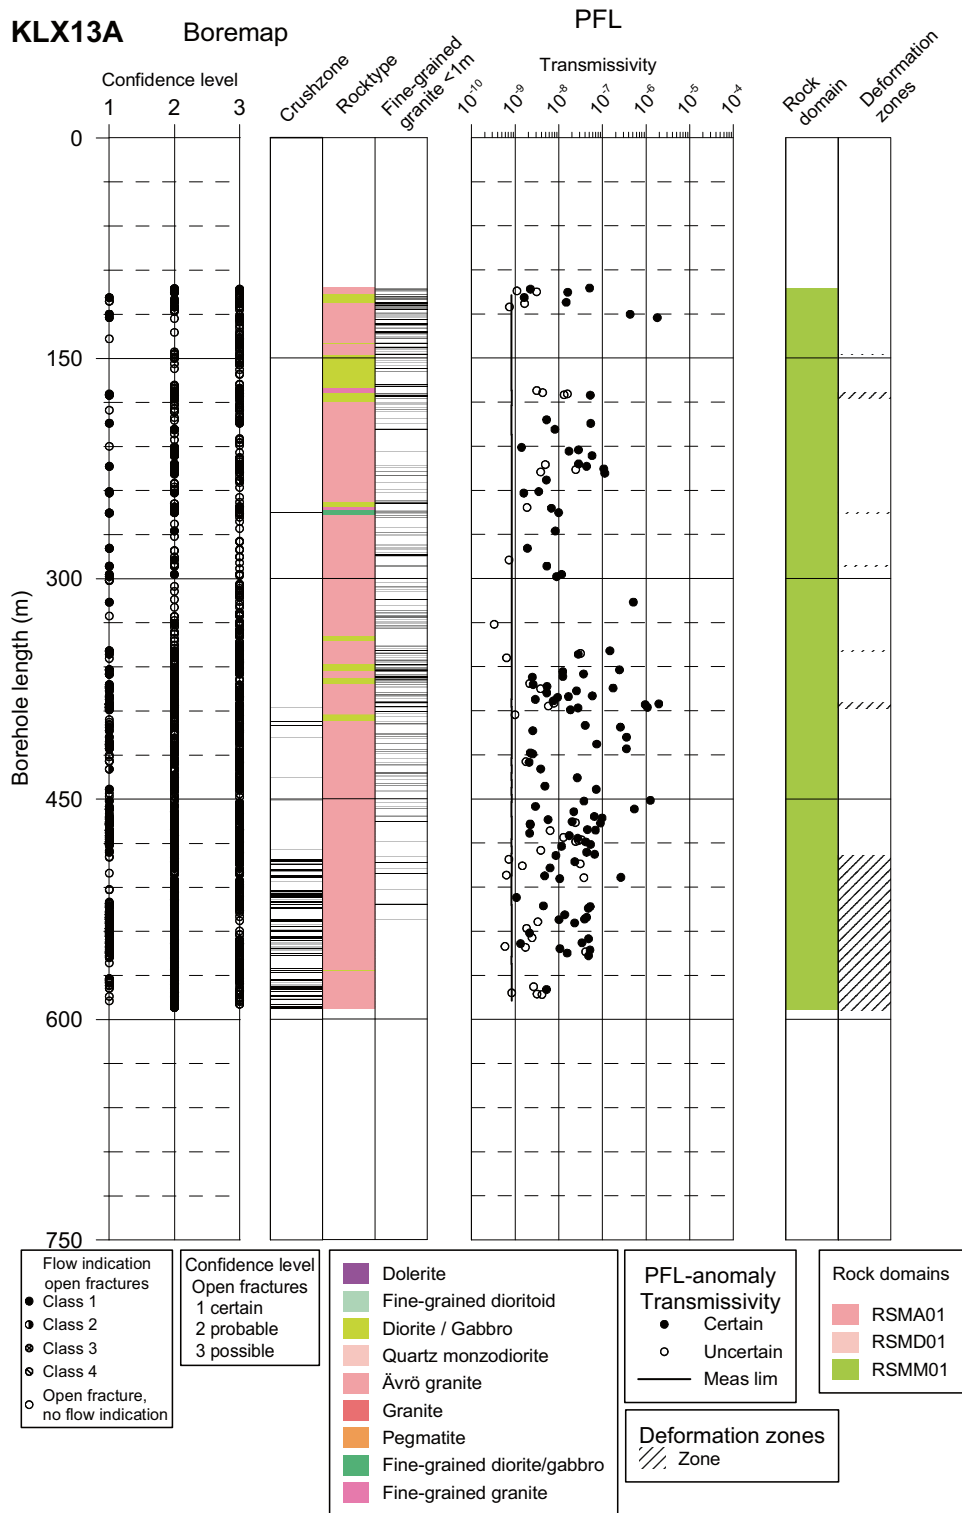


Figure 5-1. Correlations of hydraulic features based on PFL-f measurements, to mapped open / partly open fractures (all plotted as open fractures above) or crush zones in KLX13A. Interpreted deformation zones and Rock Domains shown to the right. Fractures with PFL-anom confidence (flow indication class above) > 4 are not plotted.

6 KLX14A

The borehole KLX14A was measured in November 2006. It was flow logged with PFL using 5 m test sections in borehole section interval 17.14 to 166.85 m (PFL-s). Lower most section in the borehole for statistics is the lowermost position of a flow anomaly in the borehole: 167.5 m. Flow logging for flow anomalies was made in the 1 m test sections (PFL-f) in PFL-s sections with measurable flow rates.

The borehole includes 72 PFL-anomalies, of which 50 are mapped as “certain”. 62 of the anomalies have been correlated to a single fracture. Nine anomalies have been correlated to the borehole sections mapped as crush zones.

At anomaly 11 (49.3 m) and at anomaly 55, (138.3 m) strike and dip is not defined for some of the fractures.

At anomaly 24 (87.8 m) and at anomaly 31 (92.5 m) cavities are present.

At anomaly 20, (secup 81.1) one fracture is not marked by a trace in the BDT file in the BIPS image. At anomaly 41, (secup 108.0) one fracture is evident in the BIPS image but not marked by a trace from the BDT data. At anomaly 48, (secup 114.0), anomaly 49, (secup 114.3) and at anomaly 50, (secup 115.4) fractures are not visible in the BIPS image nor marked by a trace from the BDT file.

Table 6-1. Boremap data for the PFL-s measured interval in KLX14A.

Object	KLX14A
Measured interval in the borehole with PFL-s (m)	17.14–167.5
No of open fractures mapped as Total /(Certain/ Probable/Possible) in the PFL-s measured interval	608 (83 / 302 / 223)
Mean fracture frequency of open fractures (fractures/m)	4.04
No of partly open fractures mapped as Total /(Certain/ Probable/ Possible) in the PFL-s measured interval	5/(5 / 0 / 0)
Mean fracture frequency of partly open fractures (fractures/m)	0.033
No of crush zones in the PFL-s measured interval	12
Appr. no of fractures in crush zones assuming 40 fr./m	58.00
Mean no of fractures in a crush zone	4.83
Mean fracture frequency of Total open fractures (All open, partly open and crush zone fractures) (features/m)	4.46
No of sealed fractures mapped as Total /(Certain/ Probable/Possible) in the PFL-s measured interval	675 (674 / 1 / 0)
Mean fracture frequency of sealed fractures (fractures/m)	4.49

Table 6-2. Flow anomalies in KLX14A.

Object	KLX14A
Measured interval in the borehole with PFL-s (m)	17.14–167.5
Total No of PFL-f anomalies (“Certain”+”Uncertain”)	72
No of PFL-f anomalies mapped as “ Certain ”	50
No of PFL-f anomalies mapped in crush zones	9
Mean feature frequency of PFL-f anomalies (Total) (anomalies/m)	0.479
No of crush zones in the PFL-s interval, Total/No. with one or more PFL-f anomalies	12 / 9
Mean frequency of crush zones with PFL-f anomalies	0.75
PFL-f anomaly connected to a Geological feature (Best Choice), accuracy	
Number of PFL anomalies identified within distance <0.2 m from Geological features (open and partly open fractures and crush zones)	71
Number of PFL anomalies identified within distance 0.2–0.4 m from Geological features (open and partly open fractures and crush zones)	1
Number of PFL anomalies identified within distance 0.2–0.5 m from Geological features (open and partly open fractures and crush zones)	0
Number of PFL anomalies identified within distance >0.5 m from Geological features (open and partly open fractures and crush zones)	0
Number of PFL anomalies within a distance of 0.1 m from sealed fractures (broken / unbroken), thus, not correlated to open fractures or crush zones	0 / 0
Number of PFL anomalies within a distance of >0.1 m from sealed fractures (broken / unbroken), thus, not correlated to open fractures or crush zones	0 / 0

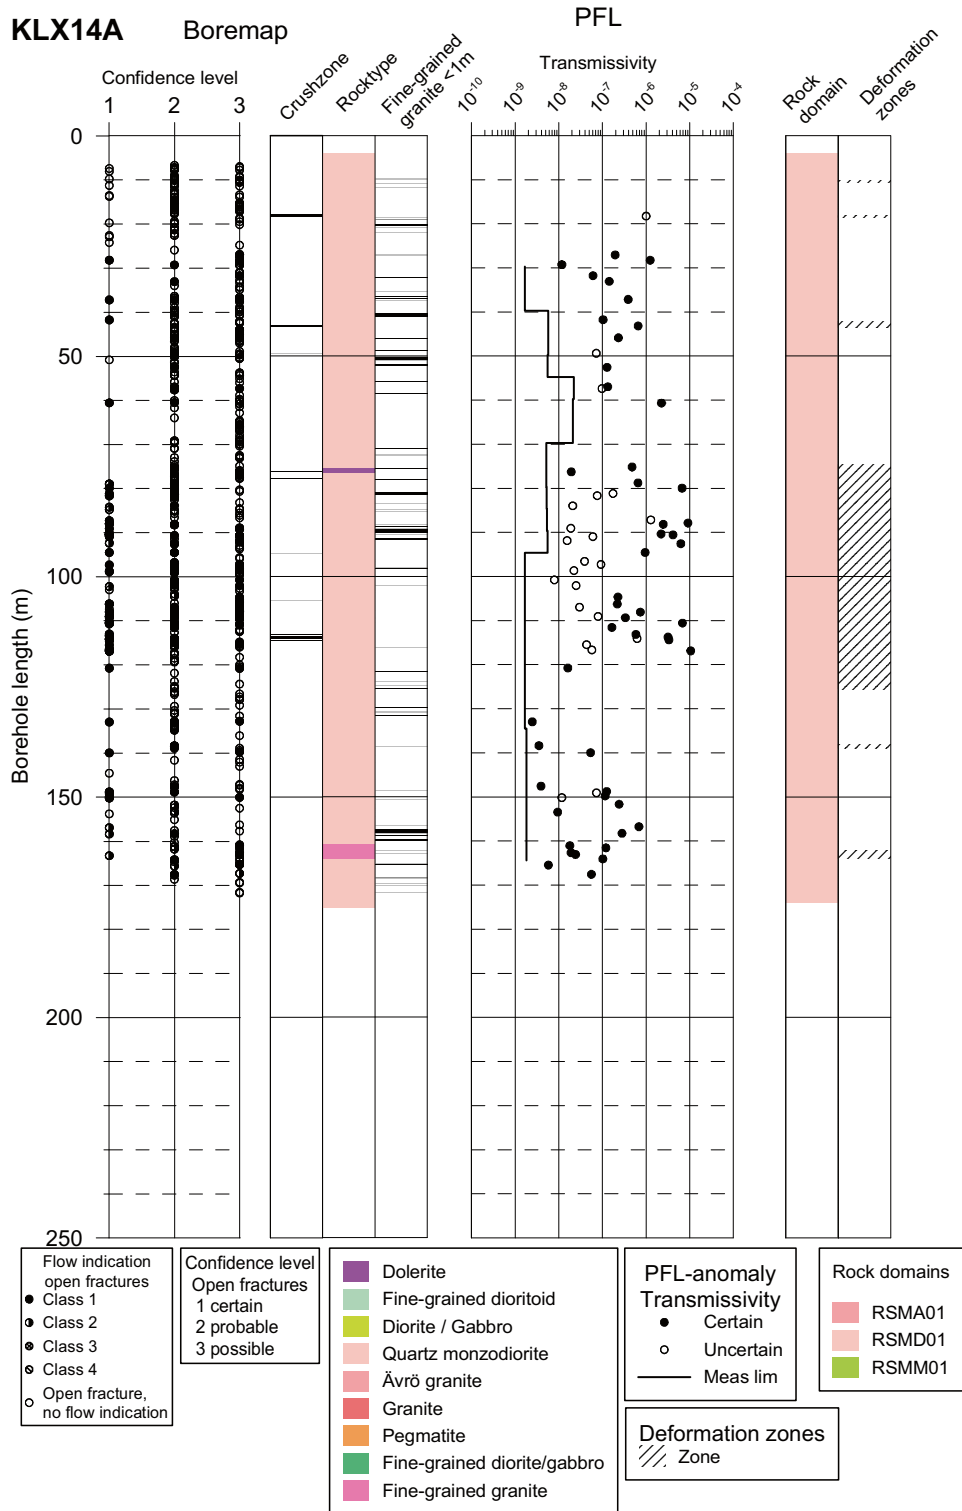


Figure 6-1. Correlations of hydraulic features based on PFL-f measurements, to mapped open / partly open fractures (all plotted as open fractures above) or crush zones in KLX14A. Interpreted deformation zones and Rock Domains shown to the right. Fractures with PFL-anom confidence (flow indication class above) > 4 are not plotted.

7 KLX15A

The borehole KLX15A was measured in May 2007. It was flow logged with PFL using 5 m test sections in borehole section interval 75.16 to 971.02 m (PFL-s). Upper most section in the borehole for statistics is the lower position of the cone in the borehole (SUB SECLW): 77.58 m. Flow logging for flow anomalies was made in the 1 m test sections (PFL-f) in PFL-s sections with measurable flow rates.

The borehole includes 78 PFL-anomalies, of which 55 are mapped as “certain”. 18 of the anomalies have been correlated to a single fracture. Seven anomalies have been correlated to the borehole sections mapped as crush zones

At anomalies 67 (402.1 m) no open fracture is visible in BIPS and a fracture defined as mapped as Broken, Sealed, at more than 6 dm distance, in the BOREMAP database have been chosen as Best Choice fracture.

At anomalies 18 (136.5 m) and 46 (262.9 m) fractures are not defined with strike and dip in the BOREMAP database.

At anomaly 26 (156.8 m) one fracture is visible in BIPS and defined in the BOREMAP database, but not marked with a trace from the BDT file in the BIPS image.

Table 7-1. Boremap data for the PFL-s measured interval in KLX15A.

Object	KLX15A
Measured interval in the borehole with PFL-s (m)	77.58–971.02
No of open fractures mapped as Total /(Certain/ Probable/Possible) in the PFL-s measured interval	1,679 (174 / 727 / 778)
Mean fracture frequency of open fractures (fractures/m)	1.88
No of partly open fractures mapped as Total /(Certain/ Probable/ Possible) in the PFL-s measured interval	7 (7 / 0 / 0)
Mean fracture frequency of partly open fractures (fractures/m)	0.008
No of crush zones in the PFL-s measured interval	7
Appr. no of fractures in crush zones assuming 40 fr./m	17.28
Mean no of fractures in a crush zone	2.47
Mean fracture frequency of Total open fractures (All open, partly open and crush zone fractures) (features/m)	1.91
No of sealed fractures mapped as Total /(Certain/ Probable/Possible) in the PFL-s measured interval	3,471 (3,467 / 2 / 2)
Mean fracture frequency of sealed fractures (fractures/m)	3.88

Table 7-2. Flow anomalies in KLX15A.

Object	KLX15A
Measured interval in the borehole with PFL-s (m)	77.58–971.02
Total No of PFL-f anomalies (“Certain”+”Uncertain”)	78
No of PFL-f anomalies mapped as “ Certain ”	55
No of PFL-f anomalies mapped in crush zones	7
Mean feature frequency of PFL-f anomalies (Total) (anomalies/m)	0.087
No of crush zones in the PFL-s interval, Total/No. with one or more PFL-f anomalies	7 / 7
Mean frequency of crush zones with PFL-f anomalies	1.00
PFL-f anomaly connected to a Geological feature (Best Choice), accuracy	
Number of PFL anomalies identified within distance <0.2 m from Geological features (open and partly open fractures and crush zones)	75
Number of PFL anomalies identified within distance 0.2–0.4 m from Geological features (open and partly open fractures and crush zones)	0
Number of PFL anomalies identified within distance 0.2–0.5 m from Geological features (open and partly open fractures and crush zones)	0
Number of PFL anomalies identified within distance >0.5 m from Geological features (open and partly open fractures and crush zones)	1
Number of PFL anomalies within a distance of 0.1 m from sealed fractures (broken / unbroken), thus, not correlated to open fractures or crush zones	0 / 0
Number of PFL anomalies within a distance of >0.1 m from sealed fractures (broken / unbroken), thus, not correlated to open fractures or crush zones	2 / 0

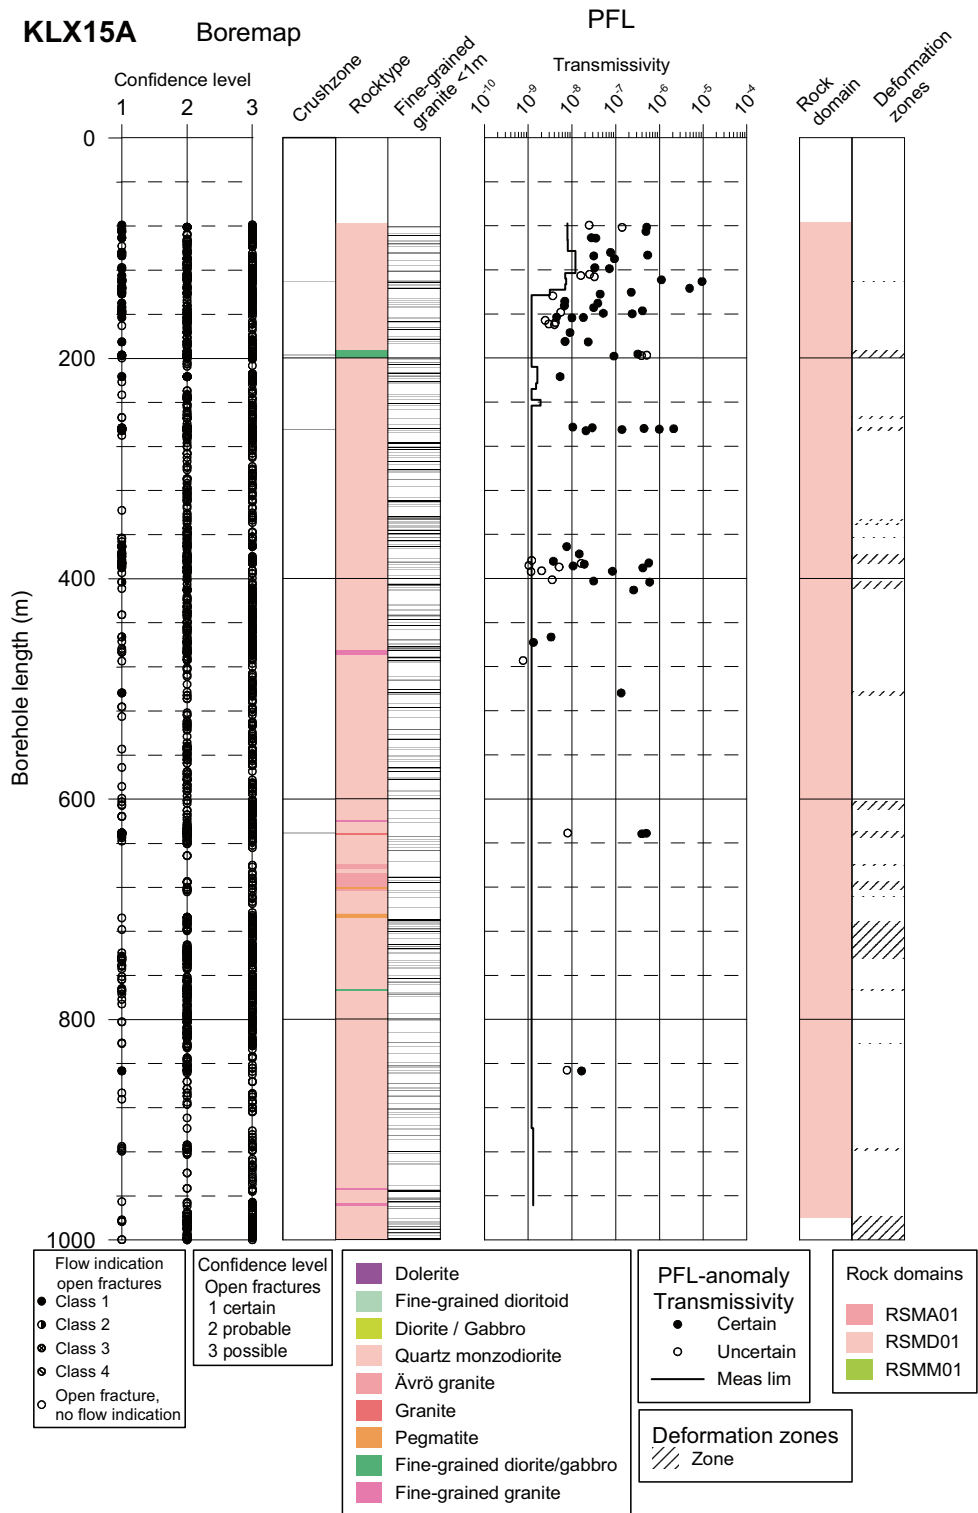


Figure 7-1. Correlations of hydraulic features based on PFL-f measurements, to mapped open / partly open fractures (all plotted as open fractures above) or crush zones in KLX15A. Interpreted deformation zones and Rock Domains shown to the right. Fractures with PFL-anom confidence (flow indication class above) > 4 are not plotted.

8 KLX16A

The borehole KLX16A was measured in February and March 2007. It was flow logged with PFL using 5 m test sections in borehole section interval 20.39 to 420.63 m (PFL-s). Flow logging for flow anomalies was made in the 1 m test sections (PFL-f) in PFL-s sections with measurable flow rates.

The borehole includes 78 PFL-anomalies, of which 62 are mapped as “certain”. 21 of the anomalies have been correlated to a single fracture. 4 anomalies have been correlated to the borehole sections mapped as crush zones.

At anomaly 25 (211.6 m) a fracture is visible in the BIPS image, but not marked with a trace from the BDT file.

Strike or dip is not defined for one fracture at anomaly 27 (213.4 m).

Table 8-1. Boremap data for the PFL-s measured interval in KLX16A.

Object	KLX16A
Measured interval in the borehole with PFL-s (m)	20.39–420.63
No of open fractures mapped as Total /(Certain/ Probable/Possible) in the PFL-s measured interval	1,186 (103 / 445 / 638)
Mean fracture frequency of open fractures (fractures/m)	2.96
No of partly open fractures mapped as Total /(Certain/ Probable/ Possible) in the PFL-s measured interval	5 (4 / 1 / 0)
Mean fracture frequency of partly open fractures (fractures/m)	0.012
No of crush zones in the PFL-s measured interval	4
Appr. no of fractures in crush zones assuming 40 fr./m	10.32
Mean no of fractures in a crush zone	2.58
Mean fracture frequency of Total open fractures (All open, partly open and crush zone fractures) (features/m)	3.00
No of sealed fractures mapped as Total /(Certain/ Probable/Possible) in the PFL-s measured interval	2,489 (2,488 / 0 / 1)
Mean fracture frequency of sealed fractures (fractures/m)	6.22

Table 8-2. Flow anomalies in KLX16A.

Object	KLX16A
Measured interval in the borehole with PFL-s (m)	20.39–420.63
Total No of PFL-f anomalies (“Certain”+“Uncertain”)	78
No of PFL-f anomalies mapped as “ Certain ”	62
No of PFL-f anomalies mapped in crush zones	4
Mean feature frequency of PFL-f anomalies (Total) (anomalies/m)	0.195
No of crush zones in the PFL-s interval, Total/No. with one or more PFL-f anomalies	4 / 4
Mean frequency of crush zones with PFL-f anomalies	1.00
PFL-f anomaly connected to a Geological feature (Best Choice), accuracy	
Number of PFL anomalies identified within distance <0.2 m from Geological features (open and partly open fractures and crush zones)	78
Number of PFL anomalies identified within distance 0.2–0.4 m from Geological features (open and partly open fractures and crush zones)	0
Number of PFL anomalies identified within distance 0.2–0.5 m from Geological features (open and partly open fractures and crush zones)	0
Number of PFL anomalies identified within distance >0.5 m from Geological features (open and partly open fractures and crush zones)	0
Number of PFL anomalies within a distance of 0.1 m from sealed fractures (broken / unbroken), thus, not correlated to open fractures or crush zones	0 / 0
Number of PFL anomalies within a distance of >0.1 m from sealed fractures (broken / unbroken), thus, not correlated to open fractures or crush zones	0 / 0

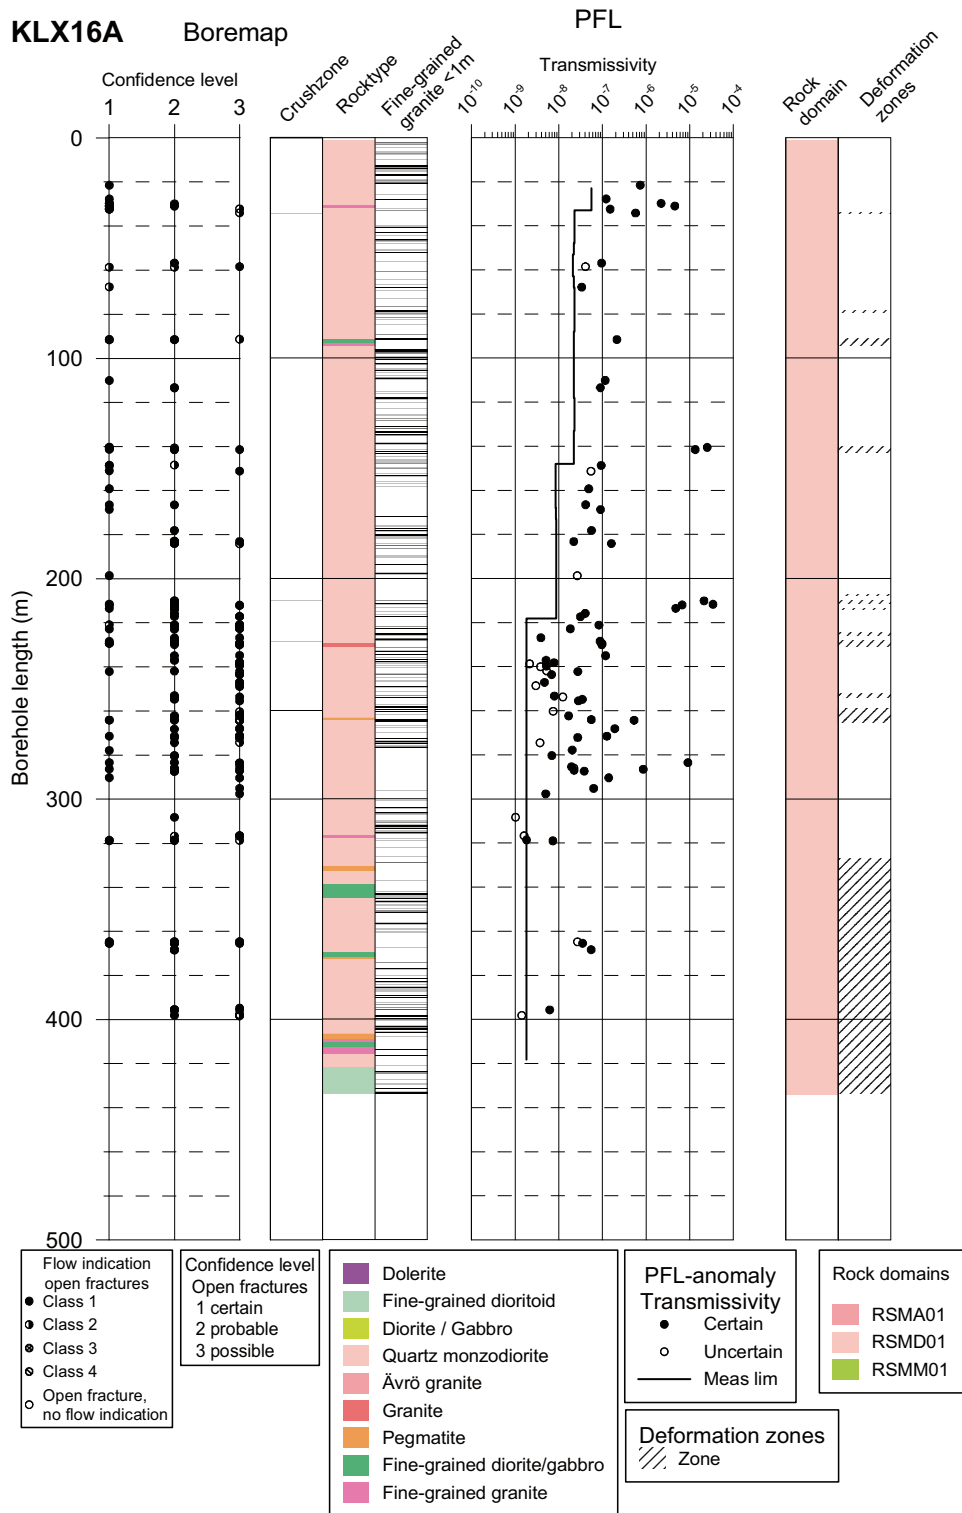


Figure 8-1. Correlations of hydraulic features based on PFL-f measurements, to mapped open / partly open fractures (all plotted as open fractures above) or crush zones in KLX16A. Interpreted deformation zones and Rock Domains shown to the right. Fractures with PFL-anom confidence (flow indication class above) > 4 are not plotted.

9 References

- Forsmark T, Wikström M, Forssman I, Rhén I, 2007.** Oskarshamn site investigation. Correlation of Posiva Flow Log anomalies to core mapped features in KLX17A, KLX18A, KLX19A, KLX20A, KLX21B. SKB P-07-215, Svensk Kärnbränslehantering AB.
- Forssman I, Zetterlund M, Forsmark T, Rhén I, 2005a.** Oskarshamn site investigation. Correlation of Posiva Flow Log anomalies to core mapped features in KSH01A, KSH02A and KAV01. SKB P-05-65, Svensk Kärnbränslehantering AB.
- Forssman I, Zetterlund M, Forsmark T, Rhén I, 2005b.** Oskarshamn site investigation. Correlation of Posiva Flow Log anomalies to core mapped features in KLX02, KLX03, KLX04, KAV04A and KAV04b. SKB P-05-241, Svensk Kärnbränslehantering AB.
- Pöllänen J, Sokolnicki M, Väisäsvaara J, 2007.** Oskarshamn site investigation. Difference flow logging of borehole KLX15A. Subarea Laxemar. SKB P-07-176, Svensk Kärnbränslehantering AB.
- Teurneau B, Forsmark T, Forssman I, Rhén I, 2007.** Oskarshamn site investigation. Correlation of Posiva Flow Log anomalies to core mapped features in KLX05, KLX06, KLX07A–B and KLX08. SKB P-07-212, Svensk Kärnbränslehantering AB.
- Väisäsvaara J, 2006.** Oskarshamn site investigation. Difference flow logging of borehole KLX14A. Subarea Laxemar. SKB P-06-318, Svensk Kärnbränslehantering AB.
- Väisäsvaara J, Pekkanen J, 2006.** Oskarshamn site investigation. Difference flow logging of borehole KLX13A. Subarea Laxemar. SKB P-06-245, Svensk Kärnbränslehantering AB.
- Väisäsvaara J, Heikkinen P, Kristiansson S, Pöllänen J, 2006.** Oskarshamn site investigation. Difference flow logging of borehole KLX12A. Subarea Laxemar. SKB P-06-185, Svensk Kärnbränslehantering AB.
- Väisäsvaara J, 2007.** Oskarshamn site investigation. Difference flow logging of borehole KLX16A. Subarea Laxemar. SKB P-07-87, Svensk Kärnbränslehantering AB.
- Wikström M, Forsmark T, Teurneau B, Forssman I, Rhén I, 2007a.** Oskarshamn site investigation. Correlation of Posiva Flow Log anomalies to core mapped features in KLX09, KLX09B–G, KLX10, KLX10B–C and KLX11A–F. SKB P-07-213, Svensk Kärnbränslehantering AB.
- Wikström M, Forsmark T, Forssman I, Rhén I, 2007b.** Oskarshamn site investigation. Correlation of Posiva Flow Log anomalies to core mapped features in KLX22A–B, KLX23A–B, KLX24A, KLX25A, KLX26A–B, KLX27A, KLX28A and KLX29A. SKB P-07-216, Svensk Kärnbränslehantering AB.